

INDUSTRIAL UV SYSTEMS

 **PT. DWIJAYA SELARAS**

OUR PARTNERSHIP:

 **Aquafine™**

OptiVenn™ Series

CONTACT US:

GUDANG MULTIGUNA ALAM SUTERA
T8 NO. 35 ALAM SUTERA
SERPONG-TANGERANG SELATAN
TELP. (021) 29047345 (HUNTING)
FAX. (021) 29047346
EMAIL: dselaras@yahoo.com

High performance, cost-effective system for stringent Industrial applications





Redefining Flexibility, Reliability and Robustness for Industrial Ultraviolet (UV) Water Treatment.

The OptiVenn Series is a family of robust and flexible UV Systems with advanced technology designed to meet the stringent requirements of Pharmaceutical, Food & Beverage, Microelectronics and other Industrial Markets.

The treatment chamber is constructed of 316L SS with two finish options. The control panel is constructed of 304 SS and is equipped with a Universal Controller which provides control, monitoring and operational information in a single convenient location.

The treatment chamber and control panel are extremely compact, yet offer flexibility of installation to accommodate into different skid designs or as a stand-alone UV System.

MARKETS: Food & Beverage, Life Sciences, Microelectronics, and General Industrial Applications

APPLICATIONS: Disinfection, Ozone destruction, and TOC reduction

Introducing Aquafine OptiVenn

Compact Footprint.

Optimized chamber design and multiple lamp arrays enable cost-effective installation in extremely compact spaces.

Proven, Robust Components.

UV sensors, lamps, drivers and panels have demonstrated reliability worldwide in thousands of installations.

Flexible Panel Installation.

All stainless steel enclosures provide maximum installation flexibility and are able to be mounted in different locations such as on the chamber or remotely to adapt to stringent space requirements.

Compact Chamber Design.

The configurable treatment chamber makes it easy to fit the UV System into small spaces and tight pipe networks. The cylinder can be rotated to allow inlet and outlet connections at 4 different angles.

User-friendly Human Machine Interface (HMI).

Intuitive interface enables at-a-glance system status checks.

Improved Lamp Technology.

Low-pressure high-output lamp (LPHO) technology provides increased process performance and extended lamp life.

Delivering Water Confidence and Comprehensive Warranty.

Aquafine UV Systems include a Lifetime Performance Guarantee and industry-leading warranties for systems and parts.

Global Support. Local Service.

A comprehensive network of certified service providers offer fast response for spare parts and service.

Ultraviolet (UV) Technology in Your Treatment Process

Ultraviolet (UV) light is a versatile, reliable, chemical-free approach to address numerous requirements in industrial water treatment.

UV for Broad-based Disinfection


- Inactivates bacteria, viruses and chlorine-resistant protozoa
- 254 nm UV penetrates the cell wall of microorganisms, attacking DNA genetic material and preventing replication
- Disinfection is typically characterized as a 3-log reduction of microorganisms, and is based on a dose of 30 mJ/cm² at the end of lamp life

UV for TOC Reduction

- 185 nm UV at a minimum dose of 90 mJ/cm²* creates powerful hydroxyl radicals that oxidize total organic carbon (TOC) molecules
- UV can be used together with Deionization (DI) and Reverse Osmosis (RO) to reduce TOC to levels below 1.0 ppb

UV for Ozone Destruction

- Residual ozone (O₃) is efficiently removed by UV at a wavelength of 254 nm
- Ozone absorbs the UV energy and quickly breaks down to dissolved oxygen (O₂)
- Typically 1.0 ppm of ozone can be reduced to less than 0.1 ppm with a UV dosage of 90 mJ/cm²

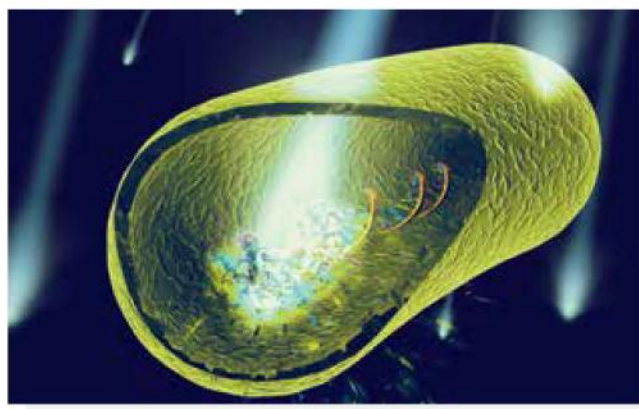

UV light attacks the microorganisms genetic material (DNA) preventing replication and infection.

Aquafine Performance Guarantee and Support

As an added incentive to keep your Aquafine equipment operating at its optimum level, Aquafine provides a Lifetime Performance Guarantee for the equipment. A Lifetime Performance Guarantee means that the UV system will achieve the targets for which it was designed and sized on the original sales order of the equipment, which considers operational parameters such as UVT of the fluid, maximum flow rate, operating pressure, fluid temperature, among others.

A Lifetime Performance Warranty will only be applicable with the use of genuine OEM replacement parts. This guarantee is valid for the life of the equipment and it is available for both new and existing equipment when applicable conditions are met.

Customer support is available from our [Authorized Distributor Network](#) and from our [24/7 Technical Service Group](#). For questions regarding your application needs, please contact your local [Authorized Distributor](#) or [Aquafine](#) for more information.



*Required dose may vary depending on application. Please contact Aquafine for proper sizing.


Flexible Treatment Chamber Requires Less Space

Benefits:

- An internal baffle and an anti-vibration mechanism optimize treatment performance, support quartz sleeves and ensure reliable system performance even at high flow rates.
- The UV System can be installed with the chamber easily rotated to one of 4 different angles (12, 3, 6 and 9 o'clock position). No special customization is required.
- The flexible chamber, enabling rotation, reduces pipework, elbows, space and installation costs
- Inlet and outlet connections are always at the same angle





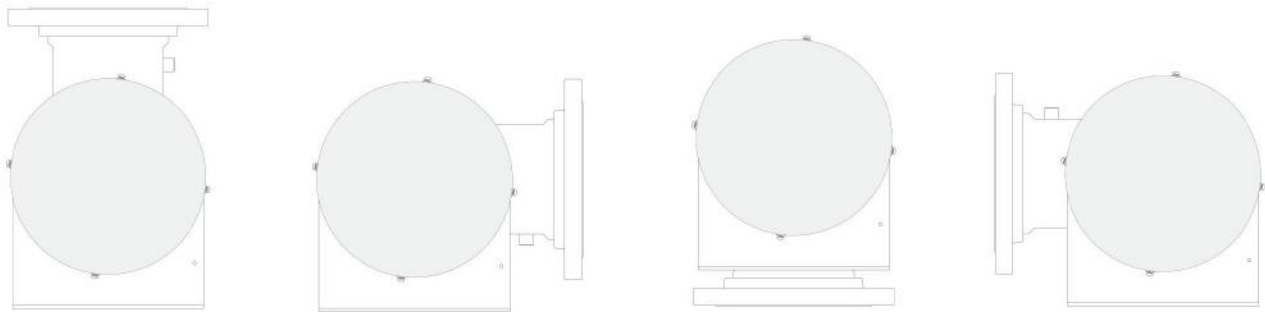


Chamber with panel mounted on the front and connections related to the back



Universal Enclosure Provides Installation Flexibility

Benefits:

- All UV Systems have a stainless steel enclosure designed to provide maximum installation flexibility and fit within stringent space requirements.
- All enclosures are compliant with the following electrical codes: cULus (Canada, USA), CE (Europe), CCC (China) and KC (South Korea).

	Standard Enclosure		Optional Enclosure			
Systems with 4 lamps or less Size (HxWxD) in (cm) Shape	Stainless Steel UL Type 1 (IP50) No need for fan or A/C 16x14x6 (41x36x15) Flat Top Mount on chamber or remotely		SMALL	Stainless Steel UL Type 4X (IP66) No need for fan or A/C 16x14x6 (41x36x15) Sloped Top Mount on chamber or remotely		SMALL
Systems with 5 to 8 lamps Size (HxWxD) in (cm) Shape	Stainless Steel UL Type 1 (IP50) Includes fan 16x20x9 (41x51x23) Flat Top Mount on chamber or remotely		MEDIUM	Stainless Steel UL Type 12/4X (IP54/66) Includes fan - Option for A/C 20x20x9 (51x51x23) Sloped Top Remote mount only		LARGE
Systems with more than 8 lamps Size (HxWxD) in (cm) Shape	Stainless Steel UL Type 12/4X (IP54/66) Includes fan - Option for A/C 20x20x9 (51x51x23) Sloped Top Remote mount only		LARGE	NA		

Compact System Design to Preserve Space

Benefits:

- The panel can be mounted in different locations to optimize the use of space, especially for frame mounted designs.
- The small and medium enclosures can be mounted on top of the cylinder (between the inlet and outlet connection), in front of the cylinder or remotely up to 15 feet apart from the cylinder. The location of the panel can be easily changed at any point in time. It is recommended that the large panel be mounted remotely (not on the cylinder).



User-Friendly HMI

Benefits:

- Intuitive interface enables at-a-glance check status of the system.
- Information displayed includes: individual lamp status, operational hours of the system and lamps, UV intensity and temperature condition of the chamber and control panel.
- A 4-20mA output signal is included with the UV monitoring option.
- Base model includes HOA (Remote Start and Stop) and LOA (Lamp Out Alert)



New High Performance UV Lamps

Benefits:

- The LPHO lamps are approximately 3 times more efficient than medium pressure lamps, delivering most of the UV output in the germicidal absorbance curve peak. Low pressure lamps operate at a lower temperature than medium pressure lamps, which leads to less fouling and less maintenance requirements.
- The OptiVenn series lamps can restart immediately after a shut down (no cool down period required) which maximizes system uptime.



OptiVenn™ Series // Disinfection

Model:	01CDS	03CDS	02CDM	02DDM	04CDM	04DDM	04CDL	04DDL	06DDL	08DDL	08EDL	08FDL	08GDL	10GDL	12GDL	12HDL	
Maximum Flow Rate																	
Flow rate (gpm)	12 gpm - 2,200 gpm*																
Flow rate (m³/hr)	2.7 m³/hr - 500 m³/hr*																
Number of UV lamps	1	3	2	2	4	4	4	4	6	8	8	8	8	10	12	12	
Electrical Requirements																	
Electrical supply	110V/60Hz-240V/50Hz, Single Phase, 2 W + Gnd																
Operating power (W)	50	150	265	265	530	530	670	670	985	1,300	1,300	1,300	1,300	1,600	1,920	1,920	
Treatment Chamber																	
Material of Construction	316L Stainless Steel																
Lamp Length - in (cm)	15 (38)			30 (76)				60 (152)									
Chamber diameter - in (cm)	6 (15)			8 (20)	6 (15)	8 (20)	6 (15)	8 (20)			10 (25)	12 (30)	14 (36)			16 (41)	
ANSI flanges size - in (cm) Optional - Tri-clamp size - in (cm)	2 (5)			3 (8)		4 (10)		6 (15)			8 (20)				10 (25)		
Monitoring and Controls																	
Standard	Base Package: Lamp status indicator, System hours of operation, Lamp out alert (LOA) and Remote start/stop (HOA)																
Optional	UV Monitoring Package: UV intensity reading with NIST certified sensor																
Control Panel																	
Standard	Rating, Material of Construction, Size (HxWxD) in (cm) Shape	UL Type 1, 304 Stainless Steel, 16x14x6 (41x36x15), Flat Top					UL Type 1, 304 Stainless Steel, 16x20x9 (41x51x23), Flat Top					UL Type 12-4X, 304 Stainless Steel, 20x20x9 (51x51x23), Sloped Top					
	Cooling Mechanism and Operating Temperatures °F (°C)	Convection, 34°-104°(1°-40°)					Forced Air, 34°-104°(1°-40°)					Forced Air, 34°-104°(1°-40°)					
Optional	Rating, Material of Construction, Size (HxWxD) in (cm) Shape	UL Type 4X, 304 Stainless Steel, 16x14x6 (41x36x15), Sloped Top					UL Type 12-4X, 304 Stainless Steel, 20x20x9 (51x51x23), Sloped Top					AC, 34°-104°(1°-40°)					
	Cooling Mechanism and Operating Temperatures °F (°C)	Convection, 34°-104°(1°-40°)					AC, 34°-104°(1°-40°)										
Elastomers																	
Standard	EPDM																
Optional	Viton																
Surface Finish																	
Standard	Ra32																
Optional	Ra15																
Operating Conditions																	
Maximum water operating temperature F(°C)	40°-104° (5°-40°)																
Maximum Operating Pressure PSI (BAR)	150 (10)																

OptiVenn™ Series // TOC

Model:		04CTM	06CTM	08DTM	08DTL	10DTL	12DTM	12DTL
Maximum Flow Rate								
Flow rate (gpm)		6 gpm - 36 gpm*						
Flow rate (m³/hr)		1.4 m³/hr - 8.2 m³/hr*						
Number of UV Lamps		4	6	8	8	10	12	12
Electrical Requirements								
Electrical Supply		110-24 110V/60Hz-240V/50Hz, Single Phase, 2 W + Gnd 0V/50-60Hz, Single Phase, 2 W + Gnd						
Operating power (W)		530	795	1,060	1,300	1,625	1,800	1,920
Treatment Chamber								
Material of Construction		316L Stainless Steel						
Chamber Length - in (cm)		30 (76)			60 (152)		30 (76)	60 (152)
Chamber Diameter - in (cm)		6 (15)		8 (20)				
ANSI flanges size - in (cm)		3 (8)		4 (10)				
Optional - Tri-clamp size - in (cm)								
Monitoring and Controls								
Standard		Base Package: Lamp Status Indicator, System Hours of Operation, Lamp out alert (LOA) and Remote start/stop (HOA)						
Optional		UV Monitoring Package: UV Intensity Reading with NIST Certified Sensor						
Control Panel								
Standard	Rating, Material of Construction, Size (HxWxD) in (cm) Shape	UL Type 1, 304 Stainless Steel, 16x14x6 (41x36x15), Flat Top		UL Type 1, 304 Stainless Steel, 16x20x9 (41x51x23), Flat Top		UL Type 12-4X, 304 Stainless Steel, 20x20x9 (51x51x23), Sloped Top		
	Cooling Mechanism and Operating Temperatures °F [°C]	Convection, 34°-104° [1°-40°]		Forced Air, 34°-104°[1°-40°]		Forced Air, 34°-104°[1°-40°]		
Optional	Rating, Material of Construction, Size (HxWxD) in (cm) Shape	UL Type 4X, 304 Stainless Steel, 16x14x6 (41x36x15), Sloped Top		UL Type 12-4X, 304 Stainless Steel 20x20x9 (51x51x23) Sloped Top		AC, 34°-104°[1°-40°]		
	Cooling Mechanism and Operating Temperatures °F [°C]	Convection, 34°-104° [1°-40°]		AC, 34°-104°[1°-40°]				
Elastomers								
Standard		Viton						
Surface Finish								
Standard		Ra32						
Optional		Ra15						
Operating Conditions								
Maximum water operating temperature F[C]		40°-104° [5°-40°]						
Maximum Operating Pressure PSI [BAR]		150 (10)						